TS-OS/R

Type A Outstation (TS-OS/R)

Description

The Type A Outstation (TS-OS) is compatible with the ETS-CP system for use as a standard fire telephone or a disabled refuge call unit.

The unit is housed in a metal enclosure allowing duplex communication with LED indication for incoming calls.

Features

- Enclosure suitable for either flush or surface mount
- Status LED
- Full duplex operation
- Automatically dials the control panel when 'off hook'
- Dual purpose, fire telephone or disabled refuge call point
- IP23 suitable for indoor use

Dimensions (mm) & Weight (kg)

TS-OS

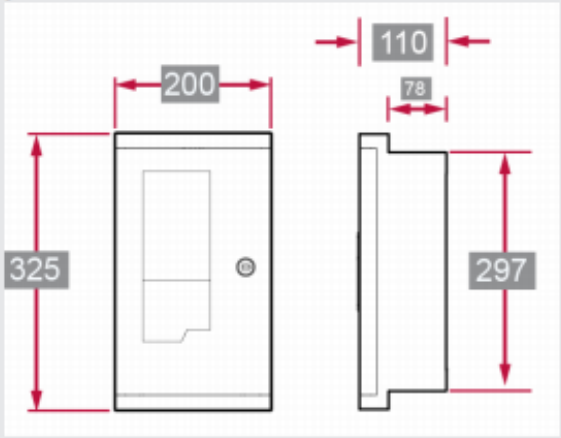

2.65 KG

Technical Specifications

Model	TS-OS/R	TS-OS/WP
Part No.	195-310	195-335
Standby Current	2mA	
Off Hook Current	40mA	
Line Voltage Standby	24Vdc	
Operating Temp.	< 50°C	< 65°C
Relative Humidity	< 90% RH	
Dimensions (mm)	325 (H) x 200 (W) x 110 (D)	339 (H) x 246 (W) x 126 (D)
Weight	2.65KG	6KG

TS-OS/WP

The unit is also available in an IP66 weatherproof enclosure with a stainless-steel handset cord (TS-OS/WP)

NOT TO BE USED FOR INSTALLATION PURPOSES.
Velocity reserves the right to make changes at any time without notice in prices, colours, materials, components, equipment, specifications and models and also to discontinue models.