

ZT-GSS / ZT-GSPK Series

Indoor Ceiling / Wall Mount Selectable Candela Speaker & Speaker Strobe

Product Description:

The ZT-GSS/ZT-GSPK are universal ceiling and wall mount speaker or speaker/strobe combination designed for audio and voice communications. The high-fidelity speaker is tested to a wide frequency range of 315Hz to 5000Hz, exceeding the UL1480 requirements. The ZT-GSS/ZT-GSPK Series offers both dependable evacuation signalling and visual alarms or a combination of both.

The ZT-GSS speaker/strobe offers tamperproof field selectable strobe options of 15, 30, 75, 115, 150, and 177 candela. The unit can be mounted in a 4" square x 2-1/8" deep back box, an extension ring is not needed. The ZT-GSS/ZT-GSPK Series provides a 25 or 70.7 VRMS speaker with field selectable power taps of 1/8W, 1/4W, 1/2W, 1W, 2W or 4W.

Each ZT-GSS/ZT-GSPK includes a mounting plate incorporating the popular Super-Slide® feature that allows the installer to easily test for supervision. The product also features a locking mechanism which secures the product to the bracket without any screws showing. The patented Checkmate® Instant Voltage Verification feature which allows the installer to check the voltage drop draw and match it to the blueprint.

The ZT-GSS/ZT-GSPK devices are listed to ANSI/UL 1638, ANSI/UL 1480 and CAN/ULC 526 and/or CAN/ULC 541 and warranted for 3 years from the date of purchase.



Features:

- Strobe nominal strobe voltage 24 VDC
- Tamperproof field selectable candela options of 15, 30, 75, 115, 150 & 177
- Speaker/Strobe 5.9" (14.9 cm) square x 3.4 (8.6cm) deep
- Speaker unit dimensions: 5.9" (14.9cm) square x 2.7" (6.8cm)
- Speaker voltage 25 or 70.7 VRMS standard, field Selectable
- Field selectable power taps: 1/8w, 1/4w, 1/2w 1w, 2w, 4w
- Frequency range 315-5000Hz
- Prewire system, installing mounting bracket, then install speaker
- Lower installation and operating costs
- Mounts to a standard 4" x 2-1/8" deep Back box x 4
- Input terminals 12 to 18 AWG
- Available in red or white
- High Fidelity speaker.
- Universal wall / ceiling mount
- Checkmate Instant Voltage Verification.
- Super Slide Bracket, Ease of supervision testing

Product Listings



- ANSI/UL 1480, ANSI/UL 1638
- CAN/ULC 526 and/or CAN/ULC 541 Listed
- CSFM: Pending

Product Compliance

- Americans with Disabilities Act (ADA)
- NFPA 72
- IBC/IFC/IRC
- Quality Management System is certified to: ISO 9001:2015

ZT-GSS Strobe & Current Settings

ZT-GSSR – Speaker /Strobe Red

ZT-GSSW – Speaker / Strobe White

Candela	24 VDC (16 – 33 Volts)	
	UL Max	24 VDC
15	35 mA	28 mA
30	41 mA	34 mA
75	74 mA	55 mA
115	107 mA	76 mA
150	138 mA	98 mA
177	162 mA	117 mA

ZT-GSPK Ceiling/Wall Mount Speaker

ZT-GSPKR – Speaker Only - Red

ZT-GSPKW – Speaker Only – White


Speaker dBA @ 10 ft.

Input Watts	25 Volts	70.7 Volts
1/8	73 dBA	73 dBA
1/4	76 dBA	76 dBA
1/2	78 dBA	78 dBA
1	81 dBA	81 dBA
2	84 dBA	84 dBA
4	87 dBA	87 dBA


ZT-GSS / ZT-GSPK Series

Indoor Ceiling / Wall Mount Selectable Candela Speaker & Speaker Strobe

Product Dimensions

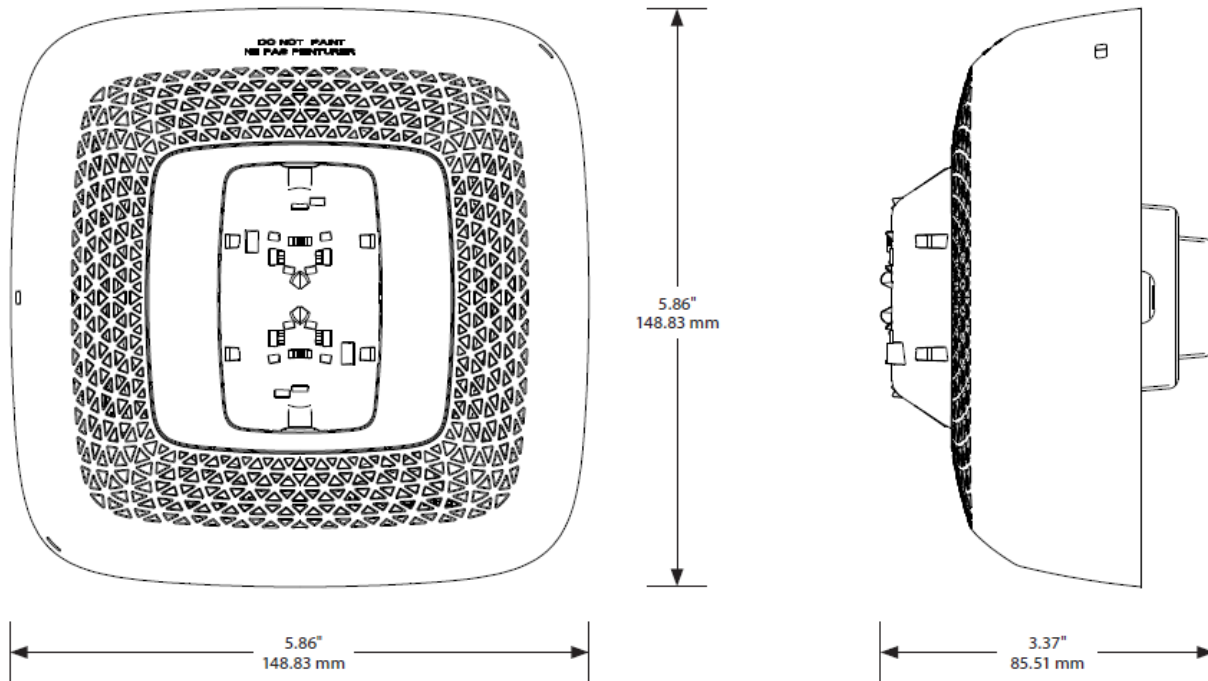

Wiring Diagram

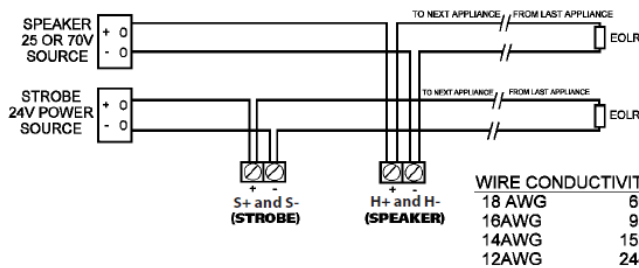

* MAX. WIRE DISTANCE (IN FEET) = $\frac{\text{PANEL VOLTAGE} - \text{DEVICE MINIMUM VOLTAGE}}{\text{TOTAL CURRENT DRAW}} \times \text{WIRE CONDUCTIVITY (STROBE ONLY)}$

- Indoor operating temperature: 32° to 120°F (0° to 49°C)
- For nominal and peak current across ANSI/UL regulated voltage range for filtered DC power, see installation manual
- This appliance is not recommended for use on coded or pulsing signalling circuits

Architect & Engineering Specifications

The fire alarm speaker and speaker/strobe shall be ZT-GSS/ ZT-GWSPK or approved equivalent and shall be listed by Underwriters Laboratories, Inc. (ANSI/UL) per ANSI/UL 1638, ANSI/UL 1480 and with CAN/ULC 526 and/or CAN/ULC 541. The speaker shall be capable of producing alarm tones or voice on all 25 or 70.7 VRMs audio systems. The speaker shall provide incremental tap settings of 1/8, 1/4, 1/2, 1, 2 or 4 watts. Minimum dBA rating at 1/4 watt shall be 76 dBA at 70.7 volts and a minimum dBA rating at 4 watts shall be 87 dBA at 70.7 volts. Tap settings shall be adjustable with field selectable jumper pins. The speaker also has a visual signal with an operating current of 35 mA or less at 24 VDC for the 15 Cd strobe circuit. The strobe appliance shall have an input voltage range of 16-33 volts direct current power for 24 VDC models. The visual signal shall have a 1 Hz flash rate regardless of input voltage. The unit shall be provided with a mounting bracket with barriers for input/output wiring, a weatherproof cover and an outdoor listed backbox. The appliance has an extended temperature range of -40 to 150F (-40 to 66C) and shall satisfy virtually all outdoor and severe environment applications. The weatherproof cover includes a gasket that must be inserted between the weatherproof cover and device. The included drain holes in the back box to allow for drainage. The seal on the waterproof cover is not water tight.

NOT TO BE USED FOR INSTALLATION PURPOSES.

Velocity reserves the right to make changes at any time without notice in prices, colours materials, components, equipment, specifications and models and also to discontinue models.

Website - www.velocity-ul.com